

MASONMATE[®]

FX³

CONCRETE SCREW



TORX
BIT AND
COVER CAP
INCLUDED

COUNTERSUNK
TORX HEAD

ZINC PLATED
CR3 FINISH

SELF
TAPPING
THREAD

REMOVABLE
AND EASY
TO ADJUST

DO IT RIGHT FIRST TIME!
USE THE **MASONMATE FX[®] 3**
CONCRETE SCREW.

Suitable for use in Concrete, Concrete Blocks, Hollow Blocks, Solid Brick, Perforated Brick and Stone.

The fastest way when attaching door and window frames, electrical boxes and furring strips.



TORX
HEAD DRIVE




BIT
INCLUDED




COVER CAP
INCLUDED


Installation Guide:




1 Pre-drill
the correct
diameter hole.



2 Position the
self tapping FX3
concrete screw.



3 Insert the screw
and tighten
using a torx bit.



4 Fit the supplied
cover cap
if required.

DO IT RIGHT FIRST TIME!

Call 0844 571 22 22 - Email sales@harclo.com - Visit www.harclo.com



HARRISON & CLOUGH LTD


MASONMATE

FX3

CONCRETE SCREW

H&C Code	Size	Description	Finish	Box Qty	Drill Size	Fastens Up To	Minimum Hole Depth	Minimum Emb. Depth	Rec. Tensile Load	Rec. Shear Load
0869T7550	7.5 x 50mm	Countersunk Head Concrete Screw c/w T30 Bit	Zinc Plated CR3	100	6mm	10mm	50mm	40mm	2.0kN	2.5kN
0869T7560	7.5 x 60mm	Countersunk Head Concrete Screw c/w T30 Bit	Zinc Plated CR3	100	6mm	20mm	50mm	40mm	2.0kN	2.5kN
0869T7580	7.5 x 80mm	Countersunk Head Concrete Screw c/w T30 Bit	Zinc Plated CR3	100	6mm	40mm	50mm	40mm	2.0kN	2.5kN
0869T75100	7.5 x 102mm	Countersunk Head Concrete Screw c/w T30 Bit	Zinc Plated CR3	100	6mm	62mm	50mm	40mm	2.0kN	2.5kN
0869T75120	7.5 x 120mm	Countersunk Head Concrete Screw c/w T30 Bit	Zinc Plated CR3	100	6mm	80mm	50mm	40mm	2.0kN	2.5kN
0869T75150	7.5 x 150mm	Countersunk Head Concrete Screw c/w T30 Bit	Zinc Plated CR3	100	6mm	110mm	50mm	40mm	2.0kN	2.5kN
0869T75180	7.5 x 180mm	Countersunk Head Concrete Screw c/w T30 Bit	Zinc Plated CR3	100	6mm	140mm	50mm	40mm	2.0kN	2.5kN

- Countersunk torx head enables easy driving
- Self tapping thread with a zinc plated CR3 finish
- Removable and easy to adjust saving time and hassle
- Ideal fix in most types of concrete, brick and stone
- Torx bit and cover cap included

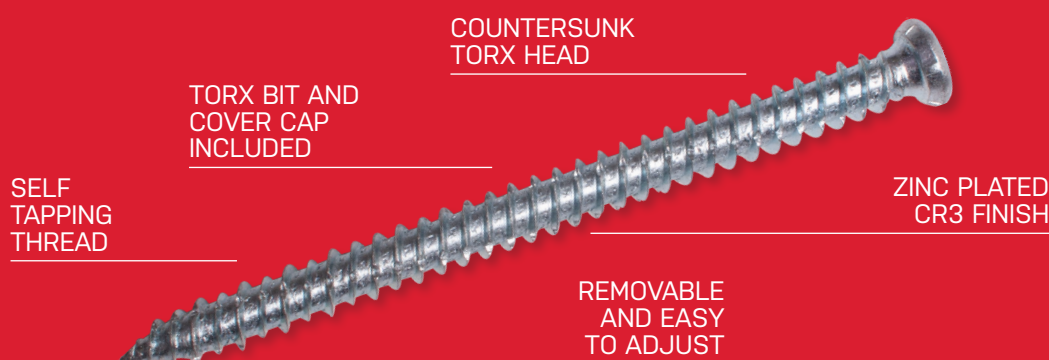

Suitable for use in:

Concrete
Concrete Blocks
Hollow Blocks
Perforated Brick
Solid Brick
Stone



Countersunk torx head enables easy driving



Self tapping thread with a Zinc Plated CR3 finish



Removable and easy to adjust saving time and hassle



Torx bit and cover cap included

DO IT RIGHT FIRST TIME!

Call 0844 571 22 22 - Email sales@harclo.com - Visit www.harclo.com



HARRISON & CLOUGH LTD